

MODEL
214

FEATURES

Increased Production and Greater Versatility


- Fast machine cycle with solenoid-operated, roller-type clutch
- Quick change feed system for different rivet sizes
- Precision machined pads on heads to locate the horns at various heights
- Adaptable to a wide variety of horns and anvil holders

Reduce Down Time

- Bronze bushing on flywheel
- Enclosed belt and top lever guards
- Easy accessibility of all parts for service
- Practical parts numbering system for quick, correct replacements
- Design and construction assure life-long service

Optional Features

- Aligning, resting and clamping fixtures
- Safety guards to job specifications
- Dual palm-buttons and safety probes
- Production counters
- Choice of paint color

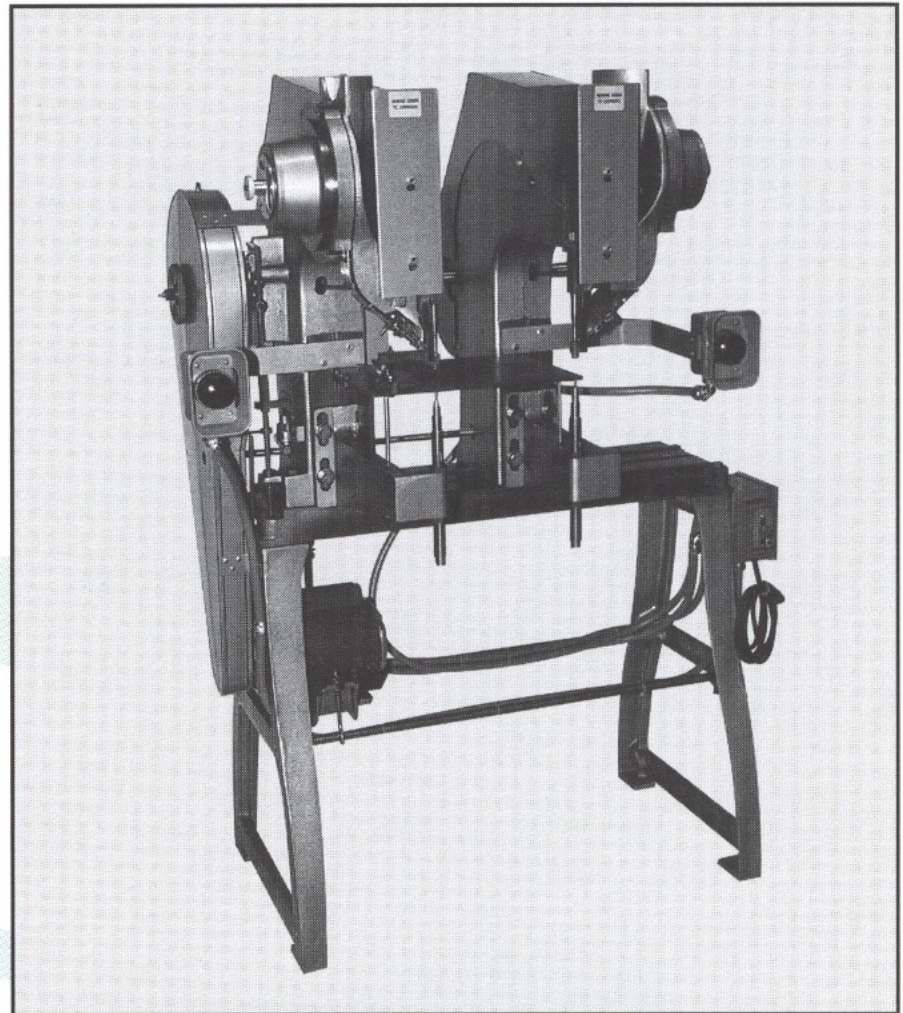

SPECIAL FEATURES

- Deepest-throat machine of the adjustable center riveters
- Wide range of applications
- Popular for three-ring binder assembly

SPECIFICATIONS

Rivet Capacity: (2) up to $\frac{5}{32}$ " dia. x $\frac{5}{8}$ " length
1 $\frac{1}{8}$ " available

Throat Depth: 14"

Stroke: 2 $\frac{1}{2}$ " std., 1 $\frac{1}{2}$ ", 3" available

Adjustable Centers: $\frac{3}{4}$ " to 6 $\frac{1}{2}$ " std., $\frac{5}{16}$ " to 18" available

Hopper: (2) 7" std., 8" & 10" available

Anvil Height: 44"

Flywheel Speed: 175 rpm

Motor: $\frac{1}{3}$ hp. 1140 rpm

Overall Height: 63"

Floor Space: 32" x 28"

Net Weight: 785 lbs.



• Established 1920 •

For Dependable Leadership in the Manufacturing of **Rivets, Rivet Machines, Parts and replacement Anvils, Drivers & Jaws**, look to our World Class Experience.

901 Frontenac Road • P.O. Box 3061 • Naperville, IL 60566-7061 • Tel.: (630) 357-8500 • Fax: (630) 983-9314