

MODEL
450

FEATURES

Increased Production and Greater Versatility


- Fast machine cycle with solenoid-operated, roller-type clutch
- Quick change feed system for different rivet sizes
- Precision machined pad on head or pedestal to locate the horn at various heights
- Adaptable to a wide variety of horns and anvil holders

Reduce Down Time

- Bronze bushing on flywheel
- Enclosed belt and top lever guards
- Easy accessibility of all parts for service
- Practical parts numbering system for quick, correct replacements
- Design and construction assure life-long service

Optional Features

- Aligning, resting and clamping fixtures
- Safety guards to job specifications
- Dual palm-buttons and safety probes
- Production counters
- Compensating spring
- Choice of paint color
- Pedestal Mounting

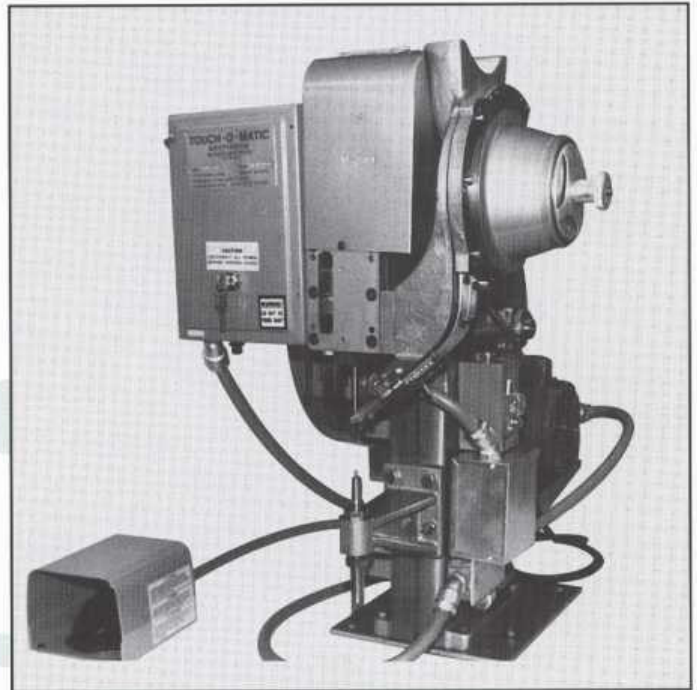

SPECIFICATIONS

- Rivet Capacity:** up to $\frac{5}{32}$ " dia. x $\frac{5}{8}$ " length,
- Throat Depth:** 6"
- Stroke:** 2" std., $\frac{3}{4}$ ", 1 $\frac{1}{4}$ " available
- Hopper:** 7"
- Anvil Height:** 10 $\frac{1}{2}$ "
- Flywheel Speed:** 200 rpm
- Motor:** $\frac{1}{4}$ hp. 1725 rpm
- Overall Height:** 29"
- Bench Space:** 20" x 26"
- Net Weight:** 190 lbs.



For Dependable Leadership in the Manufacturing of **Rivets, Rivet Machines, Parts and replacement Anvils, Drivers & Jaws**, look to our World Class Experience.

901 Frontenac Road • P.O. Box 3061 • Naperville, IL 60566-7061 • Tel.: (630) 357-8500 • Fax: (630) 983-9314