

# MODEL 722

Flexible and versatile...the 722 operates as rapidly as its operator can position the work. One of the heads is fastened permanently, the other can be positioned with a ball crank. Typical applications: automotive industry, brake shoes and heavy hardware.


## FEATURES

### *Increased Production and Greater Versatility*

- Fast machine cycle with solenoid-operated, roller-type clutch
- Quick change feed system for different rivet sizes
- Precision machined pads on heads to locate the horns at various heights
- Adaptable to a wide variety of horns and anvil holders

### *Reduce Down Time*

- Bronze bushing on flywheel
- Enclosed belt and top lever guards
- Easy accessibility of all parts for service
- Practical parts numbering system for quick, correct replacements
- Design and construction assure life-long service

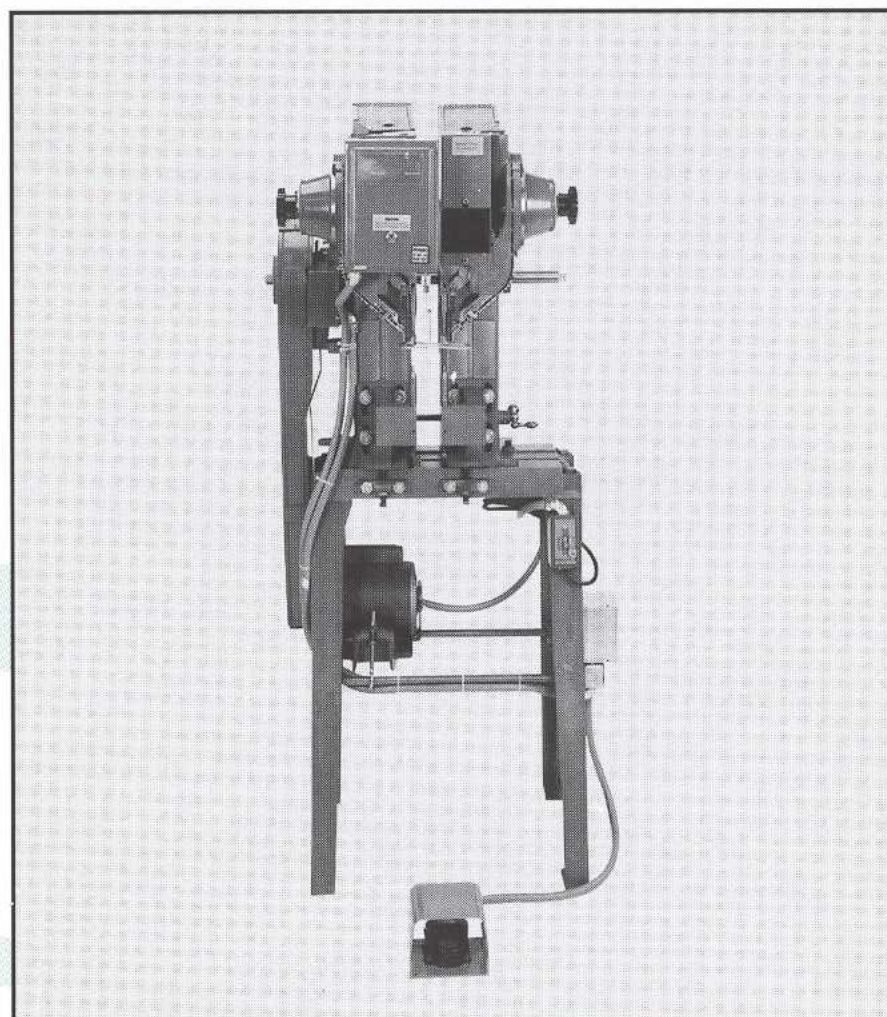

### *Optional Features*

- Aligning, resting and clamping fixtures
- Dual palm-buttons and safety probes
- Production counters
- Compensating spring
- Choice of paint color

## SPECIFICATIONS

### **Tubular**

**Rivet Capacity:** (2) up to  $\frac{3}{16}$ " dia. x  $\frac{5}{8}$ " long standard, up to  $1\frac{3}{8}$ " long available

**Throat Depth:** 9"

**Stroke:**  $2\frac{1}{2}$ " std.,  $1\frac{1}{2}$ ",  $3\frac{1}{4}$ " available

**Adjustable Centers:**  $\frac{3}{4}$ " to  $6\frac{1}{2}$ " std.,  $\frac{5}{16}$ " to 18" available

**Hopper:** (2) 7" std., 8" & 10" available

**Anvil Height:** 44"

**Flywheel Speed:** 175 rpm

**Motor:**  $\frac{1}{2}$  hp. 1140 rpm

**Overall Height:** 63"

**Floor Space:** 29" x 27"

**Net Weight:** 805 lbs.



For Dependable Leadership in the Manufacturing of **Rivets, Rivet Machines, Parts and replacement Anvils, Drivers & Jaws**, look to our World Class Experience.

901 Frontenac Road • P.O. Box 3061 • Naperville, IL 60566-7061 • Tel.: (630) 357-8500 • Fax: (630) 983-9314