

MODEL 912

FEATURES

Increased Production and Greater Versatility


- Fast machine cycle with solenoid-operated, roller-type clutch
- Quick change feed system for different rivet sizes
- Precision machined pads on column to locate the horn at various heights
- Adaptable to a wide variety of horns and anvil holders

Reduce Down Time

- Hardened steel toggle bearings
- Bronze bushing on flywheel
- Enclosed belt and top lever guards
- Easy accessibility of all parts for service
- Practical parts numbering system for quick, correct replacements
- Design and construction assure life-long service

Optional Features

- Special column and anvil heights
- Aligning, resting and clamping fixtures
- Dual palm-buttons and safety probes
- Production counters
- Compensating spring
- Choice of paint color

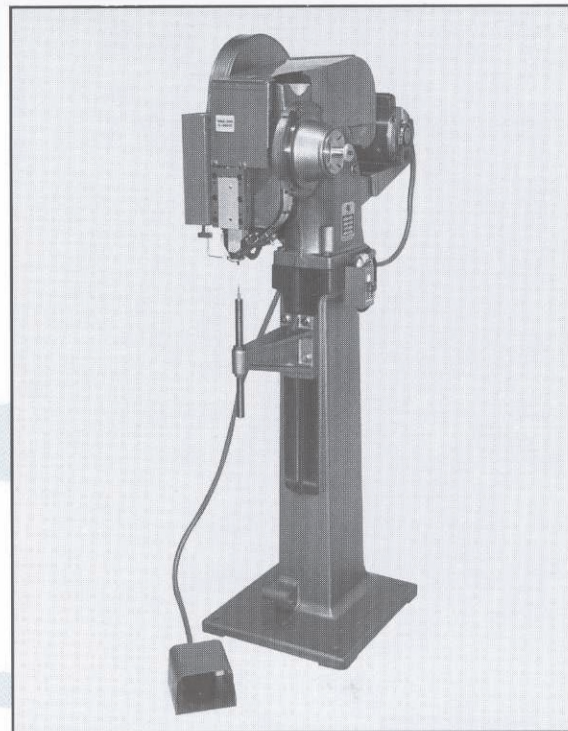

SPECIAL FEATURES

- The most versatile and most widely used of our machines
- Flexible design allows multiple assembly needs
- Appliances
- Furniture
- Automotive requirements

SPECIFICATIONS

Tubular

Rivet Capacity: up to $\frac{3}{16}$ " dia. x $\frac{5}{8}$ " length, up to $\frac{15}{16}$ " length available

Throat Depth: 12"

Stroke: 2 $\frac{1}{2}$ " std., 2 $\frac{3}{4}$ " available

Rotary Hopper: 7" std., 8" & 10" available

Anvil Height: 42"

Flywheel Speed: 175 rpm

Motor: $\frac{1}{3}$ hp. 1140 rpm

Overall Height: 65"

Floor Space: 18" x 35"

Net Weight: 555 lbs.



For Dependable Leadership in the Manufacturing of **Rivets, Rivet Machines, Parts and replacement Anvils, Drivers & Jaws**, look to our World Class Experience.