

CHICAGO RIVET & MACHINE CO.

MODELS 172 & 177

Flexible and versatile . . . with muscle when it's needed. Adjustable centers for double riveting. The 172 has a 9" throat. The 177 has a deeper 14" throat. Both have the soft-but-strong squeezing action of air-powered machines.

FEATURES

Increased production and greater versatility


- Quick change feed system for different rivet sizes.
- Precision machined pads on column to locate the horns at various heights.
- Adaptable to a wide variety of horns and anvil holders.

Reduced Down-Time

- Enclosed top lever guard.
- Easy accessibility of all parts for service.
- Practical parts numbering system for quick, correct replacement.
- Design and construction assure life-long service.

Optional Features

- Aligning, resting and clamping fixtures.
- Safety guards to job specifications.
- Dual palm-buttons and safety probes.
- Production counters.
- Choice of paint color.

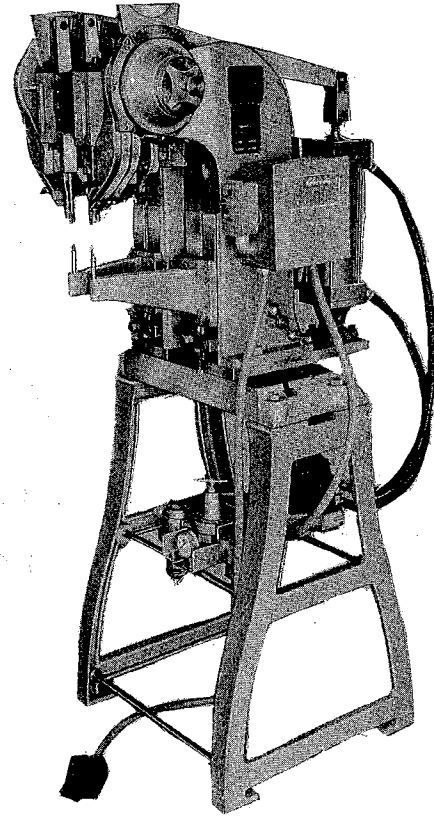

CHICAGO RIVET & MACHINE CO.

901 Frontenac Road
P.O. Box 3061
Naperville, IL 60566-7061
Tel. (630) 357-8500
Fax. (630) 983-9314

SPECIFICATIONS

Model	Tubular Rivet Capacity		Throat Depth	Stroke	Anvil Height	Hopper	Cycle Time	Overall Height	Floor Space	Net Weight	Air Required	Electrical Control
	Maximum Diameter	Maximum Length										
172	(2) 3/16"	1-3/8"	9"	3"	45"	7" Std. 8" & 10" Available	1 sec.	64"	28" x 32"	675 lbs.	65 psi 1.28 cu. ft.	110v AC 1-amp.
177	(2) 5/32"	1-3/8"	14"	3"	45"	7" Std. 8" & 10" Available	1 sec.	64"	28" x 35"	725 lbs.	65 psi 1.14 cu. ft.	110v AC 1-amp.