


CHICAGO RIVET & MACHINE CO.

MODELS 175 & 180

*Two precision machine heads . . .
two cylinders working together.
Adjustable centers for double
riveting. Sets rivets as close as
1/4" or as far as 14-1/2". The 175
is for bench mounting; the 180 is
for floor mounting.*

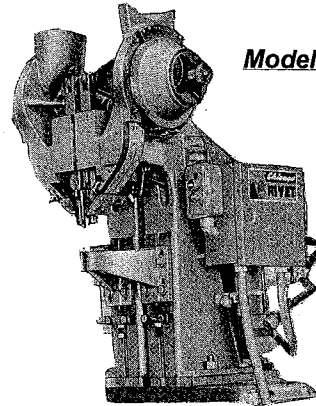

Model 175

FEATURES

Increased production and greater versatility


- Quick change feed system for different rivet sizes.
- Precision machined pads on column to locate the horns at various heights.
- Adaptable to a wide variety of horns and anvil holders.

Reduced Down-Time

- Enclosed top lever guard.
- Easy accessibility of all parts for service.
- Practical parts numbering system for quick, correct replacement.
- Design and construction assure life-long service.

Optional Features

- Aligning, resting and clamping fixtures.
- Safety guards to job specifications.
- Dual palm-buttons and safety probes.
- Production counters.
- Choice of paint color.

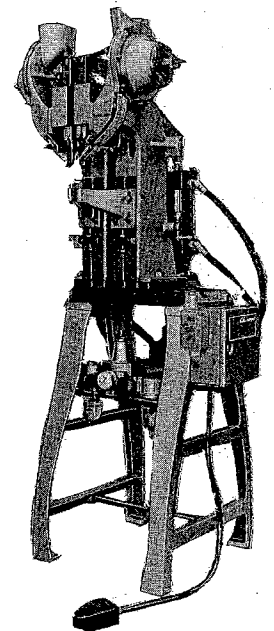

Model 180

SPECIFICATIONS

Tubular Rivet Capacity:	(2) 1/8" Dia. x 9/16" Long Max.
Throat Depth:	6"
Stroke:	2"
Rotary Hopper:	(2) 7"
Anvil Height:	Model 175 - 13-1/2" Model 180 - 44"
Adjustable Centers:	3/8" To 6" Std. 1/4" to 14-1/2" Available
Cycle Time:	.9 Sec.
Air Required Per Cycle:	65 psi, .47 cu. ft.
Electrical Control:	110v. AC, 1-amp.
Overall Height:	Model 175 - 32" Model 180 - 63"
Floor Space:	Model 175 - 26" x 30" (Bench) Model 180 - 26" x 32" (Floor)
Net Weight:	Model 175 - 380 lbs. Model 180 - 445 lbs.

CHICAGO RIVET & MACHINE CO.

901 Frontenac Road
P.O. Box 3061
Naperville, IL 60566-7061
Tel. (630) 357-8500
Fax. (630) 983-9314